


CASE STUDY BOURNE LEISURE (HAVEN)



Toilets before



Toilets after

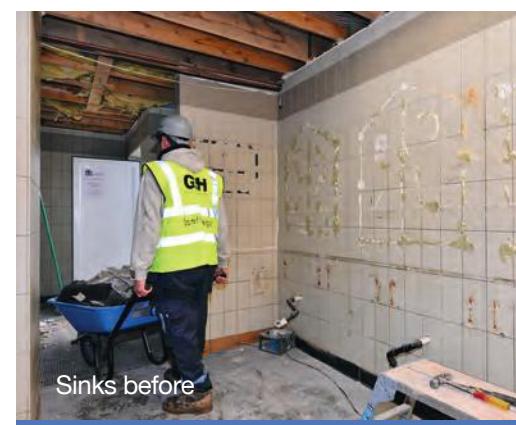

Sinks before

HEADLINES

FOUR

touring and camping block buildings fully refurbished to deadline

INVITED

to tender due to success of maintenance at other Haven sites

MODERN

bathroom, toilet, shower and changing facilities installed

ONGOING

maintenance of the Village's M&E services and fabric of the touring blocks

MANAGED

the maintenance of 17 Haven sites and have worked with Bourne Leisure since 2010



Sinks after

KEY FACTS

Client:

Location:

Bourne Leisure (Haven)

Thornwick Bay Holiday Village,
Flamborough

Services:

Planned maintenance: M&E and ventilation

CASE STUDY HOW WE DID IT



The male, female, family and disabled touring and camping block facilities were rejuvenated with the existing showers, toilets, tiles, sanitary ware, vanity units and mirrors removed and replaced.

New disabled shower and toilet facilities were also supplied and installed.

Replacement roof domes featuring a double skin were fitted while other works included the repainting of walls and woodwork, a large mural supplied and installed and the creation of a hygienic caravan waste point.

We also designed and installed a new gas fired heating system including children-friendly low surface temperature radiators.

With a strong relationship established with Bourne Leisure (Haven) over many years, we were appointed to transform one of its most popular sites on the North East coast of England ahead of the busy Spring and Summer holiday seasons. Our work was aesthetical and functional, with both the appearance and quality of services greatly improved.



Corridor after



Corridor before

Floor tiling spanning 140 sqm and wall tiling covering 260 sqm was fitted along with new LED IP-rated downlights, new extractor systems, hair dryers, power supplies and a disabled alarm system.

New ceilings with insulation were installed and so too an 'Aco' style drainage channel.

A large mural depicting Flamborough Head was installed to add a visually appealing feature.

The work was completed to a tight deadline of March 2018 ready for the Easter holidays.

The result is a big improvement aesthetically and also from a financial business perspective as the new equipment and planned maintenance of M&E services will increase efficiencies, saving a significant amount of money.



KEY CONTACT

David Ridsdale
G&H Maintenance Director
david.ridsdale@ghaint.me
0345 609 0334